

LEOCH PU512V80(512V80Ah)

PU512V80



LEOCH Provides Safe and Efficient LFP Battery Solutions.

LEOCH PU series adopt high safety LFP cell, with intelligent BMS management system independently developed by LEOCH, safe and reliable, excellent performance, stability and reliability, suitable for three-phase UPS backup system.

Features

- Safest lithium battery technology
- Eco-friendly
- 10 Years Designed service life
- Can/RS485 Communication output for monitoring
- Achieve up 32 BMU in cascade communication
- Internal cell balancing, Passive equalization, the maximum equalization current up to 200 mA
- High-precision cell voltage and temperature acquisition: ± 3 mV, $\pm 1^\circ\text{C}$
- Fan control circuit and interface, realize heat dissipation inside the module


PACK Style



Performance data

Time(min)	5	10	15	20	30	60
Constant Power(kw)	300	220	180	135.4	92.8	48
Constant Current(A)	600	480	320	240	160	80

Size

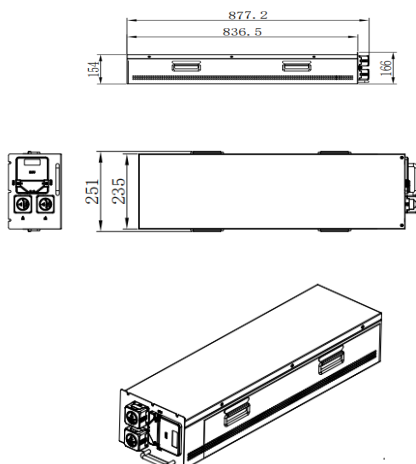

System specifications

Case Material	SPCC
Cell Type	Prismatic LiFePO ₄
Terminal Type	M10
IP Grade	IP20

Basic performance

Nominal Voltage	512V
Nominal Capacity	80Ah
Energy	40KWh
Self Discharge	$\leq 3\%$ /Month
Cell Capacity	50Ah
Cycle Life	3000 times(1C/1C)
Size	1000*600*2200
Weight	740Kg

Charge performance

Rated Charge Current	40A
Maximum Charge Current	80A
Rated Charge Voltage	448-552V
Balancing Voltage	> 544 V

Discharge performance

Max Output Power	300KW@5min
Standard Discharge Time	220KW@10min
Rated Discharge Cut-off Voltage	448V
Minimum Discharge Cut-off Voltage	424V


Temperature and humidity

Discharge Temperature	-10-55°C
Charge Temperature	0-45°C
Storage Temperature	-20-60°C
Transportation Temperature	-20-60°C
Operating Humidity	$\leq 95\%$ R.H


Other

Communication	CAN/RS485
Dry Contact	DI/DO
System Parallels	≤ 15
Screen	Optional
Thermal Management	Natural Cooling


Discharge Performance at 25°C

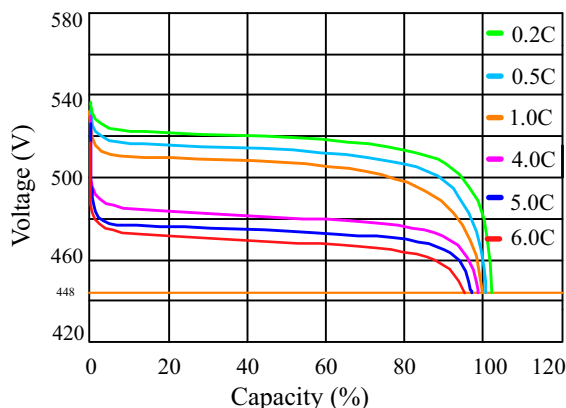


Charge and Discharge at 25°C, 0.5C

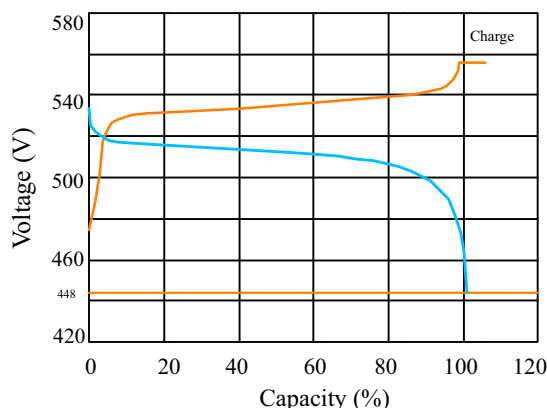

Temperature effects on capacity at 1C

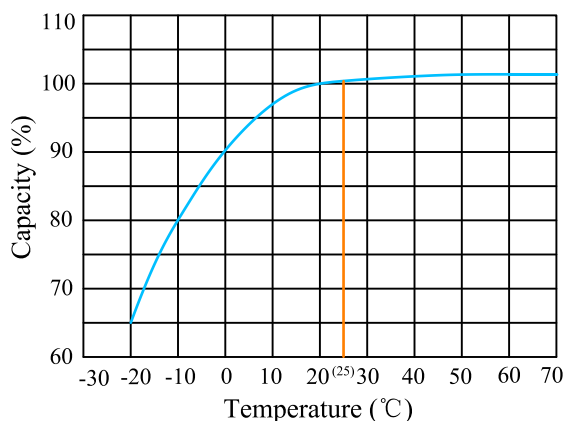

Cycle life with DOD at 25°C, 1C/1C

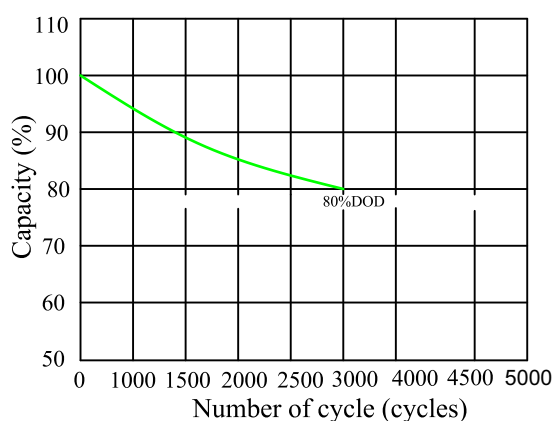

Cautions

1. Do NOT short circuit, crush or disassemble
2. Do NOT heat or incinerate.
3. Do NOT immerse in any liquid.
4. Store at 50% capacity. Recharge every 6 months. The storage area should be clean, cool, dry and ventilated.
5. Disconnect charging source prior to connecting or disconnecting battery terminals.
6. Do NOT dispose of batteries in a fire as they can explode.
7. Do NOT open, alter, or mutilate batteries. Released electrolyte is harmful to skin and eyes. It may be toxic.
8. Do NOT mix different types and brands of lithium-ion batteries.
9. Do NOT dispose in trash, follow local regulations and manufacturer's instruction.
10. See installation instructions before connecting to the supply.
11. The battery cabinet receives power from more than one source. Disconnection of all DC sources is required to De-energize this unit before installing or servicing. Wait 5 minutes before opening the unit.
12. Do NOT install on or over combustible surfaces
13. Refer to manual before servicing
14. Do NOT touch bare terminals.



Rack PU512V80(S)*-2*
S*-with HMI , No S without HMI
2-Two wire system , No 2 Three -wire system