


# DT SERIES FLOODED BATTERY

## DT-L16H (6V435Ah)

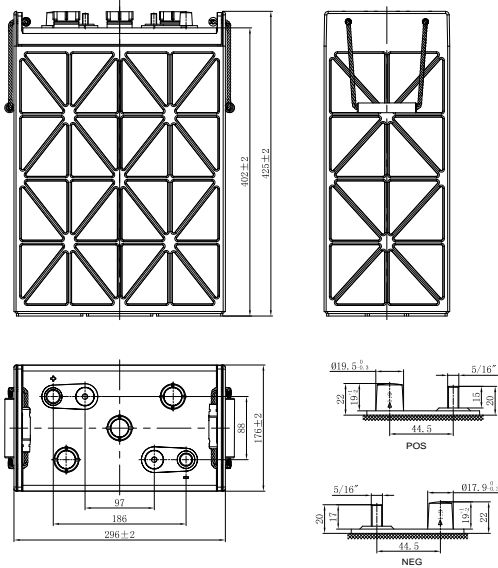

### CHARACTERISTICS

| Item               | Specifications    |                    |
|--------------------|-------------------|--------------------|
| Voltage            | 6V                |                    |
| Dimension          | Length            | 296mm (11.7inches) |
|                    | Width             | 176mm (6.93inches) |
|                    | Container Height  | 402mm (15.8inches) |
|                    | Total Height      | 425mm (16.7inches) |
| Approx Weight      | 55.5kg (122.4lbs) |                    |
| Terminal           | DT(5/16")         |                    |
| Container Material | PP                |                    |
| Rated Capacity     | 20HR              | 435Ah              |
|                    | 5HR               | 357Ah              |
| Reserve Capacity   | 25A               | 935min             |
|                    | 75A               | 245min             |


### GENERAL FEATURES

- Long cycle service life, strong recovery ability of deep discharge
- Low risk of thermal runaway, easy maintenance
- High energy, low internal resistance, low self-discharge
- Reliable sealing structure ensures no leakage during use
- Special design and structure increase battery performance
- The special alloy improves the corrosion resistance of the plate increases the service life and good deep discharge performance


### APPLICATIONS

- Electric vehicle
- Cleaning equipment
- Golf cart
- AWP
- Sightseeing bus
- Marine&RV

### Charging Characteristics

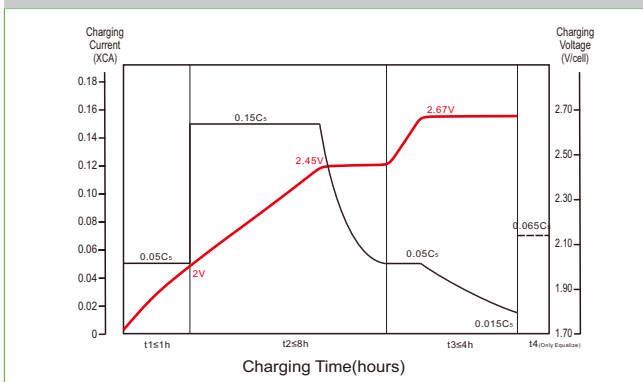

### Discharge Characteristics

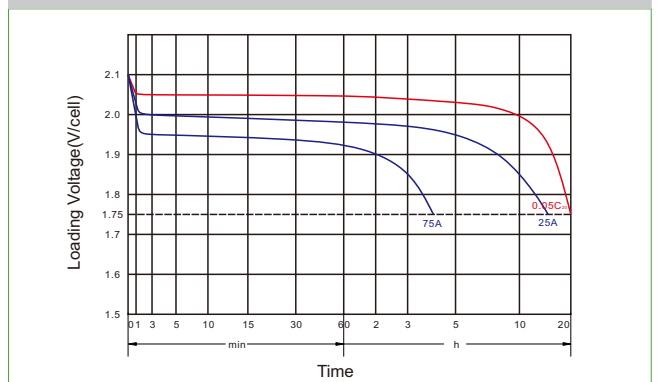

Designed in compliance with applicable BCI standard.  
Tested in compliance to BCI standard.

Leoch International Technology Ltd.  
www.leoch.com

Leoch Batteries Pte Ltd  
www.leoch.sg

Leoch Battery Corporation  
www.leoch.us

Leoch Europe S.A.  
www.leoch.eu