




DT SERIES FLOODED BATTERY

DT606 (6V210Ah)



Terminal	
D	Positive 19.5 ^{+0.3}
	Negative 17.9 ^{+0.3}

CHARACTERISTICS

Item	Specifications
Voltage	6V
Dimension	Length 260mm (10.2inches)
	Width 180mm (7.09inches)
	Container Height 248mm (9.76inches)
	Total Height 279.5mm (11.0inches)
Approx Weight	26.5kg (58.4lbs)
Terminal	DT-M8(A)
Container Material	PP
Rated Capacity	20HR 210Ah
	5HR 175Ah
Reserve Capacity	25A 380min
	75A 105min


GENERAL FEATURES

- Long cycle service life, strong recovery ability of deep discharge
- Low risk of thermal runaway, easy maintenance
- High energy, low internal resistance, low self-discharge
- Reliable sealing structure ensures no leakage during use
- Special design and structure increase battery performance
- The special alloy improves the corrosion resistance of the plate increases the service life and good deep discharge performance


APPLICATIONS

- Electric vehicle
- Golf cart
- Sightseeing bus
- Cleaning equipment
- AWP
- Marine&RV

Charging Characteristics

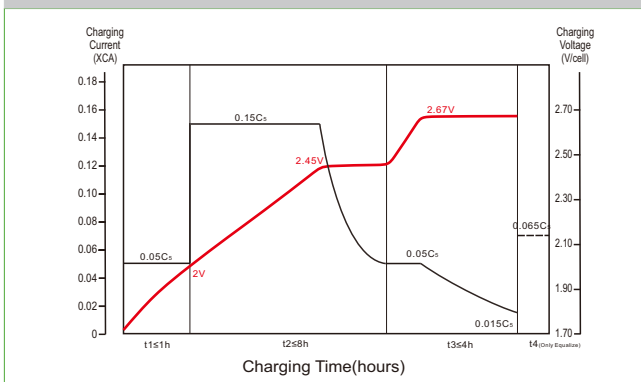

Discharge Characteristics

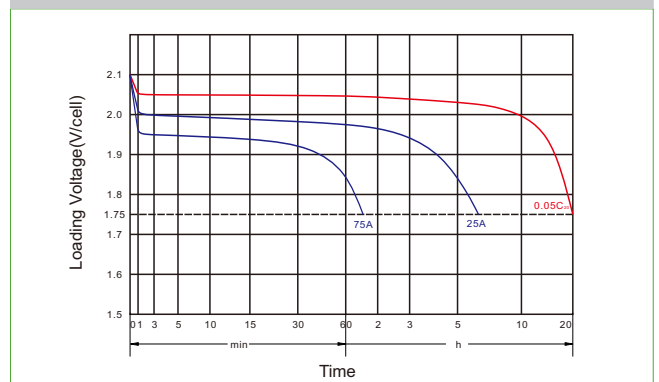

Designed in compliance with applicable BCI standard.
Tested in compliance to BCI standard.

Leoch International Technology Ltd.

www.leoch.com

Leoch Batteries Pte Ltd

www.leoch.sg

Leoch Battery Corporation

www.leoch.us

Leoch Europe S.A.

www.leoch.eu