

# Starter batteries for motorcycles

## MKS-1205MC-A 12.8V5Ah

### Physical Specification


Nominal Voltage	12.8V
Nominal Capacity (10Hr)	5.0 Ah
Dimension	Length 150±2mm (5.91 inches)
	Width 87±2mm (3.43 inches)
	Container Height 93±2mm(3.66 inches) Total
	Height (with Terminal) 93±2mm (3.66 inches)
Weight	Approx 0.831kg (1.83lbs)

- \* Motorcycle Li-ion battery
- \* Maintenance-free
- \* Real-time protection (overcharge, over-discharge, over-temperature) and energy balance of battery system through BMS
- \* Powerful 150 cold cranking amps
- \* Shipped pre-charged and ready to install
- \* Replaces YTZ12S/YTZ14S battery



### Electrical Specification

Rated Capacity	0.1C rate (0.5A)	5.0Ah
	0.5C rate (2.5A)	5.0Ah
	10C rate (50.0A)	4.5Ah
	30C rate (150.0A)	3S
Capacity affected by Temperature	40 °C (104 °F)	98%
	25 °C (77 °F)	100%
	0 °C (32 °F)	85%
	-20 °C (-4 °F)	60%
Self Discharge	Approximately 1.5% per month (25°C (77°F))	
Charging Methods	Constant-Voltage Charge: Full Charge Initial charging current: less than 0.8A Voltage: 14.40 V ~ 14.60 V at 25 °C (77 °F)	

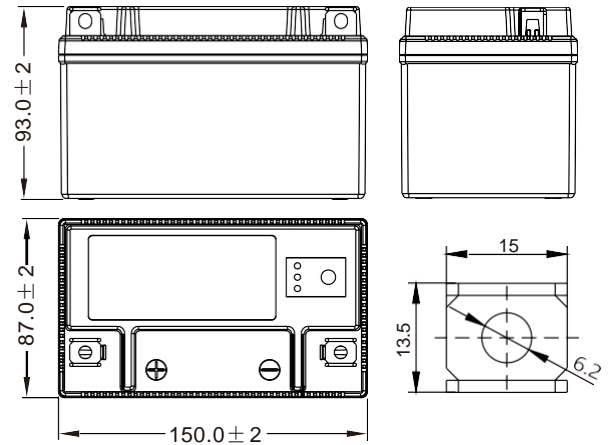

Dimensions (mm)

### Curve Specification

