


# Residential Energy Storage Battery (Wall-mounted)



LW51.2-150

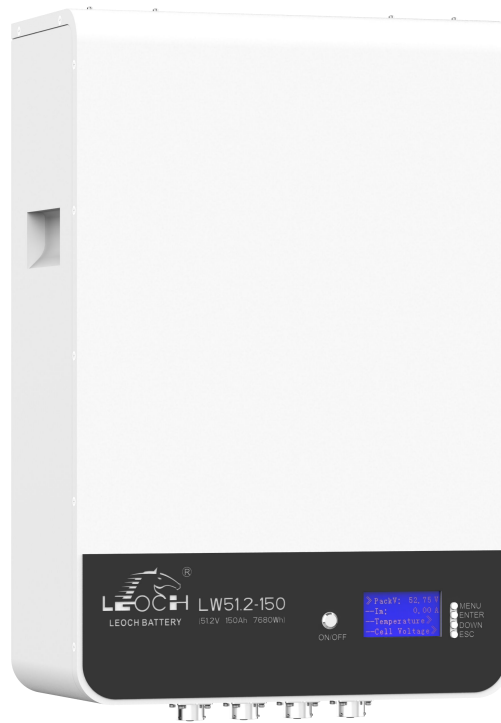

**High Efficiency**

Max. efficiency 95%



**Eco-Friendly**

Clean energy



**Long Lifespan**

Sustainable long cycles



**Built-in BMS**

Charge & discharge protection

## Product Introduction



Up to 15 groups of parallel connections,  
flexible capacity expansion



Compatible with mainstream inverters in the  
market, providing more options



LED display for voltage, current, temperature,  
convenient for users to query



Built-in BMS provides multiple protection  
functions

Item	Parameters
Specifications and models	<b>LW51.2-150</b>
Nominal voltage	51.2V
Nominal capacity	150Ah
Maximum continuous charge/ discharge current	100A/100A
Discharge voltage/Maximum charge	43.2 V/58.4 V
Weight	67kg
Dimensions(W×D×H)(mm)	400x600x200
Cycle life	6000 cycles @ 80% DOD
Max number of parallel connections	15
Self-discharge (month)@25°C	≤3%
BMS communication types	RS485/RS232/CAN
Cooling Mode	Free Cooling
IP Class	IP54
Display Fuction	LCD Display
Design Life	15 Years
Storage Temperature	-20°C to 60°C
Operate Temperature	charge: 0°C to 45°C; discharge: -10°C to 55°C
Relative Humidity	5% to 95%
Working Pressure	61kPa~113kPa
Compatible Inverters	PYLON, Sacolar, Deye, Growatt, Sofar, Voltronic, LUX, Schneider, Afore, Sinexcel, SUNGROW, Sorotec, GoodWe, KSTAR, Srne, Must, Megarevo, Sol-Ark, INVNT, Aiswei, TBB, SAKO, Solis, SMA, Victron, SMK, BlueSun